


## Multiple Spring Seal

### Materials

Rotary - Car / SiC / SSiC / TC  
 Elastomer - NBR / EPDM / Viton / Aflas / FFKM

### Working Conditions

Pressure ≤ 20 bar  
 Speed ≤ 25 m/s  
 Temperature from -40°C up to 205°C

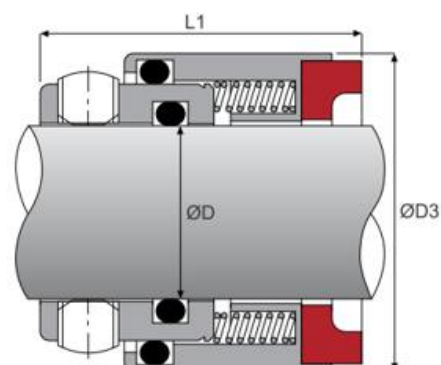

Shaft ØD	ØD3	L1
18	32	27.9
20	34	27.9
22	36	27.9
24	38	29.9
25	39	29.9
28	42	32.4
30	44	32.4
32	46	32.4
33	47	32.4
35	49	32.4
38	54	33.9
40	56	33.9
43	59	33.9
45	61	33.9
48	64	33.9
50	66	34.4
53	69	34.4
55	71	34.4
58	78	38.9
60	80	38.9
63	83	38.9
65	85	38.9
68	88	37.4
70	90	44.9
75	99	44.9
80	104	44.2
85	109	44.2
90	114	49.2
95	119	49.2
100	124	49.2